

Raw Material/  
Energy Extraction

Preliminary  
Production

Manufacture of  
End Products

# Environmental Product Declaration (EPD) for Precast Concrete **CPCI** **PCI**

According to ISO 14025 and ISO 21930



## **Structural** **Precast Concrete** **Industry Wide EPD**



ASTM INTERNATIONAL

# Environmental Product Declaration

According to ISO 14025 and ISO 21930

This EPD is an industry wide or industry average cradle-to-gate EPD for *Structural Precast* manufactured by Canadian Precast/Prestressed Concrete Institute & Precast/Prestressed Concrete Institute members.

## EPD PRODUCTION STAGE SUMMARY RESULTS - ONE METRIC TON OF STRUCTURAL PRECAST


Category Indicator	Unit	Raw Material Supply	Transport	Manufacturing	Weighted Average Total
		A1	A2	A3	
Global warming potential	kg CO <sub>2</sub> eq.	212.1	14.9	29.3	256.3
Acidification potential	kg SO <sub>2</sub> eq.	0.7	0.1	0.1	0.9
Eutrophication potential	kg N eq.	0.2	0.0	0.0	0.2
Smog creation potential	kg O <sub>3</sub> eq.	11.2	2.8	1.5	15.5
Ozone depletion potential	kg CFC-11	3.4E-05	5.7E-10	9.7E-07	3.5E-05
<b>Primary Energy Consumption</b>					
Total Primary Energy	MJ, HHV	1,925.1	205.8	501.6	2,632.5
Non-renewable (fossil, nuclear)	MJ, HHV	1,901.5	205.5	484.8	2,591.9
Renewable (solar, wind, biomass hydroelectric, & geothermal)	MJ, HHV	70.3	0.3	16.8	87.4
<b>Material resources consumption</b>					
Total Material Resource Consumption	kg	1,033.4	0.0	0.3	1,033.7
Non-renewable materials	kg	1,031.1	0.0	0.1	1,031.2
Renewable materials	kg	2.2	0.0	0.2	2.4
Fresh water	L	2,532.1	0.0	379.1	2,911.2
<b>Waste generated</b>					
Non-hazardous	kg	2.1	0.0	27.6	29.6
Hazardous	kg	0.12	0.0	4.7	4.8

## ASTM International Certified Environmental Product Declaration

This is an industry wide business-to-business Type III environmental product declaration for structural precast. This declaration has been prepared in accordance with ISO 14025 and ISO 21930, the governing precast concrete category rules and ASTM international's EPD program operator rules.

The intent of this document is to further the development of environmentally compatible and more sustainable construction products by providing comprehensive environmental information related to potential impacts of structural precast available in the USA and Canada in accordance with international standards.

### Environmental Product Declaration Summary

Owners of the EPD	
 <p style="font-size: small;">CANADIAN PRECAST/PRESTRESSED CONCRETE INSTITUTE INSTITUT CANADIEN DU BÉTON PRÉFABRIQUÉ ET PRÉCONTRAIN</p> 	<p><b>Canadian Precast/Prestressed Concrete Institute</b> PO Box 24058 Hazeldean, Ottawa Ontario, Canada K2M 2C3 Link (URL): <a href="http://www.cpci.ca">www.cpci.ca</a></p> <p><b>Precast/Prestressed Concrete Institute</b> 200 West Adams St., Suite 2100 Chicago, IL 60606 Link (URL): <a href="http://www.pci.org">www.pci.org</a></p> <p>Each trade association/institute and their respective member companies provided both LCI and meta-data to support this EPD. Their combined membership operate more than 700 facilities in the US and Canada producing structural, architectural, utility and specialty precast products used on, above and below grade applications. This EPD represents an average product as a production-weighted average from plants of more than one manufacturer. The owner of the declaration is liable for the underlying information and evidence.</p>
<b>Product Group and Name</b>	Structural Precast Concrete (UN CPC 3755)
<b>Product Definition</b>	Structural precast concrete is a construction product produced by casting concrete in a reusable mold or "form" which is then cured in a controlled environment, transported to the construction site and lifted into place. Structural precast concrete is used in building or civil engineering works and is primarily composed of cement, aggregates and reinforcement materials.
<p><b>Product Category Rules</b></p> 	ASTM International, Product Category Rules For Preparing an Environmental Product Declaration For Precast Concrete, March 2015 [1].
<b>Certification Period</b>	September 25.2019 – September 25, .2024

<b>Declared Unit</b>	1 metric tonne (1,000 kg) of structural precast product and optionally 1 short ton (2,000 lbs) of structural precast product.
<b>ASTM Declaration Number</b>	EPD-117

<b>Program Operator</b>	ASTM International
<b>Declaration Holder</b>	Canadian Precast/Prestressed Concrete Institute & Precast/Prestressed Concrete Institute

**Declaration Type**  
 An industry average “cradle-to-gate” EPD for structural precast as a product group manufactured by CPCI and PCI members. Activity stages or information modules covered include production with the product ready for shipment from the point of manufacture (modules A1 to A3). The declaration is intended for use in Business-to-Business (B-to-B) communication.

**Applicable Countries**  
 United States and Canada


**Product Applicability**  
 Structural precast concrete products satisfy a wide array of building and civil engineering applications.

**Content of the Declaration** This declaration follows Section 11; Content of the EPD, ASTM International, Product Category Rules For Preparing an Environmental Product Declaration For Precast Concrete, March 2015.

<b>This EPD was independently verified by ASTM in accordance with ISO 14025:</b> Internal                      External X	Tim Brooke 100 Barr Harbor Drive, PO Box C700 West Conshohocken, PA 19428-2959, USA <a href="http://www.astm.org/EPDs.htm">www.astm.org/EPDs.htm</a>
--	---

**EPD Project Report Information**

<b>EPD Project Report</b>	An Industry Average Cradle-to-Gate Life Cycle Assessment of Precast Concrete Products for the US and Canadian Markets, September 2019
---------------------------	---

<b>Prepared by</b> 	Athena Sustainable Materials Institute 119 Ross Avenue, Suite 100 Ottawa, Ontario, Canada K1Y 0N6 <a href="mailto:info@athenasmi.org">info@athenasmi.org</a>
---	---

<b>This EPD project report was independently verified by in accordance with ISO 14025 and the reference PCR:</b>	Thomas P. Gloria, Ph. D. Industrial Ecology Consultants 35 Bracebridge Rd. Newton, MA 02459-1728 <a href="mailto:t.gloria@industrial-ecology.com">t.gloria@industrial-ecology.com</a>
--	---

**PCR Information**

<b>Program Operator</b>	ASTM International
-------------------------	--------------------

<b>Reference PCR</b>	ASTM International, Product Category Rules For Preparing an Environmental Product Declaration For Precast Concrete (March 2015)
----------------------	---

<b>PCR review was conducted by:</b>	Nicholas Santero, thinkstep Inc. – Chair Christine Subasic, Consulting Architectural Engineer and Juan Tejada, ORCO Block Company
-------------------------------------	--

## 1 PRODUCT IDENTIFICATION

### 1.1 PRODUCT DEFINITION

Precast concrete (UN CPC 3755) is a construction product produced by casting concrete in a reusable mold or "form" which is then cured in a controlled environment, transported to the construction site and lifted into place. In contrast, standard concrete is placed into site-specific forms and cured on site. Precast concrete is primarily composed of Portland cement, aggregates and steel reinforcement materials. For the purposes of this EPD the following broad descriptive definition for structural precast is as follows [1]:

[Structural precast products](#) | superstructure bridge products such as bridge decks, girders, and parapets; substructure bridge products such as abutments, piers, footings, and pile caps; building products such as columns, beams, interior solid bearing and shear walls, double tees, hollowcore, spandrels, and solid slabs; stairs and stadia seating; and other items such as piles, footings, barriers, retaining walls, rail ties, sound walls and the like. Structural precast products can be conventionally reinforced or prestressed.

This EPD represents a baseline or benchmark for the Canadian and United States structural precast industry and exemplifies an average product group as an average from more than one manufacturer.

## 2 PRODUCT APPLICATION

Structural precast concrete products are engineered products satisfying a wide array of building and civil engineering applications.

## 3 DECLARED UNIT

The declared unit is 1 metric tonne of structural precast. Data is additionally presented per short ton [1].

## 4 MATERIAL CONTENT

Table 1 below presents the weighted average material content by input material for the structural precast product group as derived from participating member facilities LCI data.

**Table 1: Weighted Average Material Content for Structural Precast Product Group**


Material Inputs	SI Units per Metric tonne of Structural Precast		Imperial Units per Short ton of Structural Precast	
	Amount	Unit	Amount	Unit
Portland Cement	152.2	kg	304.4	lbs
Portland Limestone Cement (PLC)	7.0	kg	14.0	lbs
Fine Aggregate - natural sand	298.3	kg	596.6	lbs
Fine Aggregate - manufactured	59.4	kg	118.8	lbs
Coarse Aggregate - natural gravel	156.6	kg	313.1	lbs
Coarse Aggregate - crushed	233.3	kg	466.7	lbs
Manufactured Lightweight Aggregate	2.6	kg	5.1	lbs
Natural Lightweight Aggregate	3.0	kg	6.0	lbs
SCMs - Fly Ash	14.5	kg	29.0	lbs
SCMs - Silica Fume	1.8	kg	3.7	lbs
Slag Cement	2.7	kg	5.3	lbs
Chemical Admixture (CA) - Air Entraining	0.14	litre	0.03	gallon
CA - Water Reducer/Plasticizer	0.17	litre	0.04	gallon
Chemical Admixture - Accelerator	0.26	litre	0.06	gallon
CA - High Range Water Reducer	0.74	litre	0.18	gallon
CA - Corrosion Inhibiting	0.76	litre	0.18	gallon
CA - Retarding Admixture	0.04	litre	0.01	gallon
Form Release Agent	0.12	litre	0.03	gallon
Rebar	18.7	kg	37.4	lbs
Welded Wire Reinforcement (WWR)	5.7	kg	11.4	lbs
Steel Anchors	4.7	kg	9.5	lbs
Steel Stressing Strand	13.8	kg	27.7	lbs
Polypropylene Fibers	0.002	kg	0.003	lbs
Glass Fibre Reinforced Polymer (GFRP) reinforcing bars	0.00	kg	0.001	lbs
Expanded Polystyrene	0.74	bd ft	0.67	bd ft
Extruded Polystyrene	0.15	bd ft	0.14	bd ft
Brick	0.43	kg	0.87	lbs
Pigments	0.07	kg	0.14	lbs
Net Consumables	0.10	litre	0.02	gallon
Total Batch Water Use	59.4	litre	14.2	gallon

## 5 PRODUCT STAGE

The product stage includes the following modules [1]:

- A1 Raw material supply;
- A2 Transport to the manufacturer; and
- A3 Manufacturing and terminal operations.

Figure 1 shows the product stage system boundary for the declared product system.

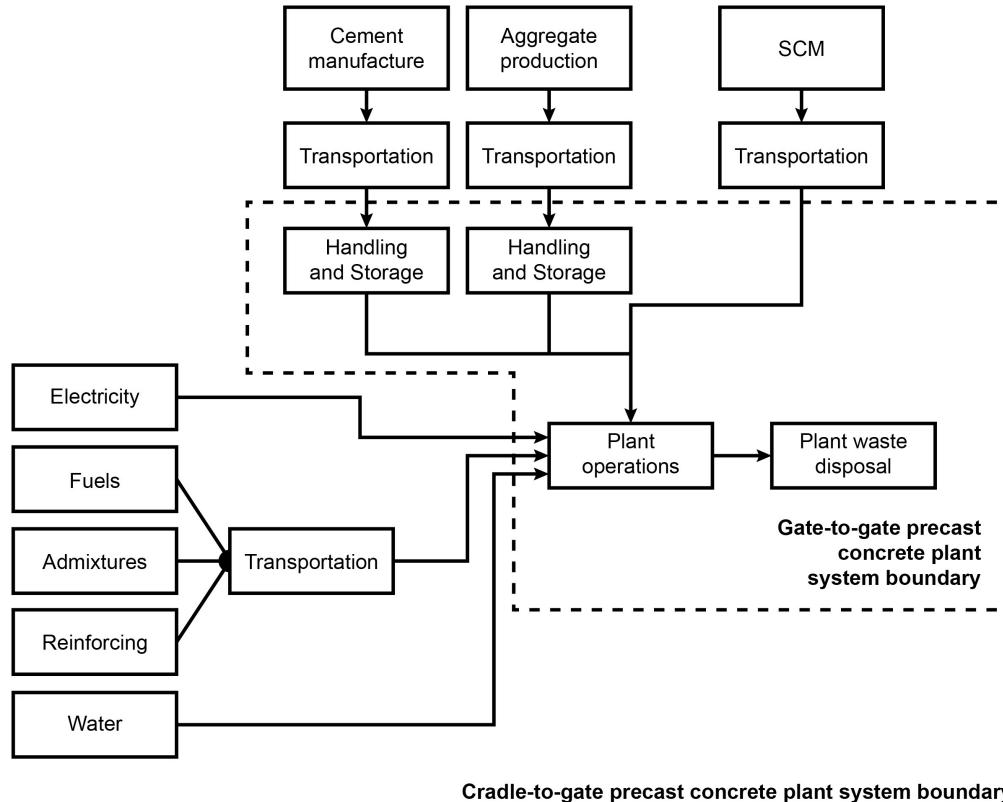

**Figure 1 Product stage system boundary**

The Product Stage includes the following processes [1]:

- A1 - Extraction and processing of raw materials, including fuels used in product production and transport within the manufacturing process (A3);
- A2 - Average or specific transportation of raw materials from the extraction site or source to manufacturing site, inclusive of empty backhauls (where applicable);
- A3 - Manufacturing of each precast product including all energy and materials required and all emissions and wastes produced;
- Average or specific transportation from manufacturing site to recycling/reuse/landfill for pre-consumer wastes and unutilized by-products from manufacturing, including empty backhauls (where applicable);
- Final disposition of pre-consumer wastes inclusive of transportation;

The Product Stage excludes the following processes [1]:

- Production, manufacture, and construction of manufacturing capital goods and infrastructure;
- Formwork;
- Production and manufacture of production equipment, delivery vehicles, and laboratory equipment;
- Personnel related activities (travel, office operations and supplies); and
- Energy and water use related to company management and sales activities that may be located either within the factory site or at another location.

## 6 LIFE CYCLE INVENTORY

### 6.1 DATA COLLECTION AND REPRESENTATIVENESS

CPCI and PCI members combined operate about 700 precast manufacturing facilities in the United States and Canada. Manufacturing facilities vary in size as well as the product types they produce. For example, some firms only produce structural or architectural products while others may produce these as well as other specialty products. Annual life cycle inventory data were collected from 58 facilities within Canada and the United States spanning the period 2016 to 2018. In total the participating facilities produced in the order of 3.9 million metric tons of precast. All gate-to-gate LCI flow data for energy, total water use, emissions and waste generated were averaged on the annual production basis across facilities to determine an overall per unit precast plant operations profile. These per unit gate-to-gate operational flows were used to estimate the plant production effects across all precast product groups as plants were unable to provide detailed process breakdowns for each product group, but provided annual product group production figures. As this EPD represents an industry benchmark, the commissioners agreed it would be more informative to also report a median result for input and output flows under direct control of precast producers; i.e., core manufacturing (A3). The median flows for electricity and fuels, non-batch water use as well as generated wastes were determined and modeled (linked to A1 and A2 upstream modules). The “median” production result is reported separately and provides an alternative benchmark for precast producers.

### 6.2 CUT OFF RULES, ALLOCATION RULES AND DATA QUALITY REQUIREMENTS

*Cut-off rules*, as specified in ASTM PCR for precast concrete: 2015, section 7.3, were applied [1]. All input/output flow data reported by the participating member facilities were included in the LCI modeling. None of the reported flow data were excluded based on the cut-off criteria.

*Allocation procedures* observed the requirements and guidance of ISO 14044:2006, clause 4.3 and those specified in ASTM PCR for precast concrete, section 7.5. The majority of the precast facility operations were dedicated to the production of one or more of the four precast product groups. A small number of the facilities also produced



other specialty precast products – a co-product - and in such instances “mass” allocation was used to allocate facility LCI environmental flows (inputs and outputs) across the co-products for those facilities prior to calculating and rolling up the weighted average LCI flows for the gate-to-gate process and individual product groups.

In addition, the following allocation rules are applied (Section 7.5, ASTM PCR for precast concrete):

- Allocation related to transport is based on the mass and distance of transported input;
- Recovered materials (slag cement, fly ash, synthetic gypsum, etc.) are considered raw materials. Only the materials, water, energy, emissions, and other elemental flows associated with reprocessing, handling, sorting, and transportation from the point of the generating industrial process to their use in the production process are considered. Any allocations before reprocessing are allocated to the original product;
- The environmental flows related to the disposal of the manufacturing (pre-consumer) solid and liquid waste are allocated to module A3 Manufacturing.

*Data quality requirements*, as specified in ASTM’s Precast Concrete PCR: 2015, section 7.3, were observed [1]. This section also describes the achieved data quality relative to the ISO 14044:2006 requirements. Data quality is judged on the basis of its precision (measured, calculated or estimated), completeness (e.g., unreported emissions), consistency (degree of uniformity of the methodology applied within a study serving as a data source) and representativeness (geographical, temporal, and technological).

**Precision:** The Canadian and United States participating member companies through measurement and calculation collected primary data on their production of precast concrete and the various sub-group product categories. For accuracy the LCA team individually validated these plant gate-to-gate input and output data.

**Completeness:** All relevant, specific processes, including inputs (raw materials, energy and ancillary materials) and outputs (emissions and production volume) were considered and modeled to represent industry average precast concrete as well as precast product sub groups of interest. The relevant background materials and processes were taken from the US LCI Database (adjusted for known data placeholders), ecoinvent v 3.4 LCI database for United States and Canada as modeled in SimaPro software v.8.5.2.0 August 2019.

**Consistency:** To ensure consistency, the LCI modeling of the production weighted input and output LCI data for each precast product sub-groups used the same modeling structure across the member facilities producing these products, which consisted of input raw and ancillary material, energy flows, water resource inputs, product and co-products outputs, emissions to air, water and soil, and material recycling and pre-consumer solid and liquid waste treatment. Crosschecks concerning the plausibility of mass and energy flows were continuously conducted. The LCA team conducted mass

and energy balances at the plant and selected process level to maintain a high level of consistency.

**Reproducibility:** Internal reproducibility is possible since the data and the models are stored and available in N.A. Precast Athena LCI database developed in SimaPro, 2015. A high level of transparency is provided throughout the report as the weighted average LCI profile for each product sub-group is presented for the declared product. Key primary (manufacturer specific) and secondary (generic) LCI data sources are summarized in Table 2. The provision of more detailed data to allow full external reproducibility was not possible due to reasons of confidentiality.

**Representativeness:** The representativeness of the background and foreground data is detailed in Table 2 of the EPD project background report and is summarized here as follows.

- **Time related coverage** of the precast manufacturing process- primary data collected: 2016 to 2018 (latest consecutive 12 months).
- Generic data: the most appropriate LCI datasets were used as found in the US LCI (adjusted) Database, ecoinvent v.3.4 database for United States, Canada and global.
- **Geographical coverage:** the geographical coverage is the United States and Canada.
- **Technological coverage:** typical or average.

## 7 LIFE CYCLE ASSESSMENT

### 7.1 RESULTS OF THE LIFE CYCLE ASSESSMENT

This section summarizes the results of the life cycle impact assessment (LCIA) based on the cradle-to-gate life cycle inventory inputs and outputs analysis. The results are calculated on the basis of one metric ton (1,000 kg) of structural precast (Table 2), but are also provided for one short ton (2000 lbs.) of structural precast (Table 3). The structural precast production results are delineated by information module (A1 – Raw material supply), (A2 – Raw material transport), and (A3 – precast core manufacturing).

Table 4 provides a percent contribution summary by information model for each of the supported indicators and inventory parameters. Contribution analysis is an analytical method used to support the interpretation of LCA results and to facilitate the reader's understanding of the environmental profile of the declared product.

As per ASTM PCR for precast concrete:2015, Section 8, the US EPA Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI), version 2.1, 2012 impact categories are used as they provide a North American context for the mandatory category indicators to be included in this EPD. These are relative expressions only and do not predict category impact end-points, the exceeding of thresholds, safety margins or risks. Total primary and sub-set energy consumption was compiled using a cumulative

energy demand model. Material resource consumption and generated waste reflect cumulative life cycle inventory flow information.

**Table 2: LCA results – Structural Precast, one metric ton - absolute basis**

Category Indicator	Unit	Raw Material Supply	Transport	Manufacturing	Weighted Average Total	A3 Median Total
		A1	A2	A3		
Global warming potential	kg CO <sub>2</sub> eq.	212.1	14.9	29.3	256.3	253.2
Acidification potential	kg SO <sub>2</sub> eq.	0.7	0.1	0.1	0.9	0.9
Eutrophication potential	kg N eq.	0.2	0.0	0.0	0.2	0.2
Smog creation potential	kg O <sub>3</sub> eq.	11.2	2.8	1.5	15.5	15.2
Ozone depletion potential	kg CFC-11	3.4E-05	5.7E-10	9.7E-07	3.5E-05	3.5E-05
<b>Primary Energy Consumption</b>						
Total Primary Energy	MJ, HHV	1,925.1	205.8	501.6	2,632.5	2,392.8
Non-renewable (fossil, nuclear)	MJ, HHV	1,901.5	205.5	484.8	2,591.9	2,534.2
Renewable (solar, wind, biomass hydroelectric, & geothermal)	MJ, HHV	70.3	0.3	16.8	87.4	122.8
<b>Material resources consumption</b>						
Total Material Resource Consumption	kg	1,033.4	0.0	0.3	1,033.7	1,033.7
Non-renewable materials	kg	1,031.1	0.0	0.1	1,031.2	1,031.2
Renewable materials	kg	2.2	0.0	0.2	2.4	2.4
Fresh water	L	2,532.1	0.0	379.1	2,911.2	2,632.4
<b>Waste generated</b>						
Non-hazardous	kg	2.1	0.0	27.6	29.6	13.57
Hazardous	kg	0.12	0.0	4.7	4.8	0.3

Note: A3 Median Total is the Production total (A1, A2 and A3 summed) based on the calculated median flows for A3

**Table 3: LCA results- Structural Precast, one short ton - absolute basis**

Category Indicator	Unit	Raw Material Supply	Transport	Manufacturing	Weighted Average Total	A3 Median Total
		A1	A2	A3		
Global warming potential	kg CO <sub>2</sub> eq.	192.4	13.5	26.6	232.5	229.7
Acidification potential	kg SO <sub>2</sub> eq.	0.6	0.1	0.1	0.8	0.8
Eutrophication potential	kg N eq.	0.2	0.0	0.0	0.2	0.2

Category Indicator	Unit	Raw Material Supply	Transport	Manufacturing	Weighted Average Total	A3 Median Total
		A1	A2	A3		
Smog creation potential	kg O <sub>3</sub> eq.	10.1	2.6	1.4	14.1	13.8
Ozone depletion potential	kg CFC-11	3.1E-05	5.2E-10	8.8E-07	3.1E-05	3.1E-05
<b>Primary Energy Consumption</b>						
Total Primary Energy	MJ, HHV	1,746.4	186.7	455.1	2,388.2	2,170.7
Non-renewable (fossil, nuclear)	MJ, HHV	1,725.0	186.4	439.8	2,351.3	2,299.0
Renewable (solar, wind, biomass hydroelectric, & geothermal)	MJ, HHV	63.7	0.3	15.2	79.2	111.4
<b>Material resources consumption</b>						
Total Material Resource Consumption	kg	937.5	0.0	0.3	937.7	937.7
Non-renewable materials	kg	935.4	0.0	0.1	935.5	935.5
Renewable materials	kg	2.0	0.0	0.2	2.2	2.2
Fresh water	L	2,297.1	0.0	343.9	2,641.0	2,388.1
<b>Waste generated</b>						
Non-hazardous	kg	1.9	0.0	25.0	26.9	12.3
Hazardous	kg	0.105	0.0	4.3	4.4	0.3

Note: A3 Median Total is the Production total (A1, A2 and A3 summed) based on the calculated median flows for A3

**Table 4: LCA results- Structural Precast - percent basis**

Weighted Average Basis	Raw Material Supply	Transport	Manufacturing
	A1	A2	A3
Global warming potential	82.7%	5.8%	11.4%
Acidification potential	74.8%	9.5%	15.7%
Eutrophication potential	90.1%	2.8%	7.1%
Smog creation potential	72.0%	18.2%	9.7%
Ozone depletion potential	97.2%	0.0%	2.8%
Total Primary Energy	73.1%	7.8%	19.1%
Non-renewable (fossil, nuclear)	73.4%	7.9%	18.7%
Renewable (solar, wind, biomass hydroelectric, & geothermal)	80.4%	0.3%	19.2%
Total Material Resource Consumption	100.0%	0.0%	0.0%

Weighted Average Basis	Raw Material Supply	Transport	Manufacturing
	A1	A2	A3
Non-renewable materials	100.0%	0.0%	0.0%
Renewable materials	91.7%	0.0%	8.3%
Fresh water	87.0%	0.0%	13.0%
Non-hazardous	6.9%	0.0%	93.1%
Hazardous	2.4%	0.0%	97.6%

## 7.2 INTERPRETATION

Across the three production information modules, module A1- raw material supply contributes the largest share of the impact category results – accounting for between 97% (ozone depletion) and about 83% (global warming potential) of the impact burden. The upstream raw material supply (A1) also accounts for the largest share of energy use; almost all of which is drawn from non-renewable energy sources. With the exception of smog creation potential, raw material transportation (A2) proves to be a minor contributor to the burdens exhibited by precast products – generally 10% or less. Manufacturing (A3) structural precast products contributes in the order of 11% of all greenhouse gases and 19% of the primary energy use.

The life cycle impact indicator results, based on median A3 manufacturing flows, vary little as these indicators are driven primarily by the specified upstream materials (A1) for each precast product group. Generally, the median result indicators and metrics are lower than those of the weighted average profile, indicating that the median plant uses less energy and water and generates less solid wastes.

The significance of these results is as follows:

- Raw material supply (upstream material effects) is the major source of the environmental impacts of precast products and is significantly influenced by cement use – efforts to optimize or reduce the input of cement by using less burdensome cement blends or increasing supplementary cementitious materials use would markedly improve the environmental performance of all precast products.
- As the manufacturing stage is a substantial consumer of energy and responsible for a significant share of the impacts, any process or energy conservation improvements would directly and significantly lower the environmental profile of precast products.

## 8 ADDITIONAL ENVIRONMENTAL INFORMATION

### *Quality and Environmental Management Systems*

In general, CPCI and PCI member manufacturing facilities follow the ISO 14001 environmental management system, ISO 9001 quality management system or other in-house quality control systems.

### *Health Protection*

The OSHA standards are applicable and followed.

- U.S. Department of Labor, Occupational Safety & Health Administration (OSHA),  
29 CFR, PART 1910 Occupational Safety and Health Standards.

<https://www.osha.gov/laws-regs/regulations/standardnumber/1910>

No additional health protection measures extending beyond mandatory occupational safety measures for commercial operations are required.

## 9 DECLARATION TYPE AND PRODUCT AVERAGE DECLARATION

The type of EPD is defined as:

A “Cradle-to-gate” EPD of structural precast covering the product stage (modules A1 to A3) and is intended for use in Business-to-Business communication.

This EPD for structural precast, UN CPC 3755 is an average product EPD, as an average from several CPCI and PCI member facilities.

## 10 DECLARATION COMPARABILITY LIMITATION STATEMENT

The following ISO statement indicates the EPD comparability limitations and intent to avoid any market distortions or misinterpretation of EPDs based on the ASTM’s Precast Concrete PCR: 2015:

- EPDs - Declarations based on the ASTM Precast Concrete PCR [1] are not comparative assertions; that is, no claim of environmental superiority may be inferred or implied.

## 11 EPD EXPLANATORY MATERIAL

For any explanatory material, in regard to this EPD, please contact the program operator.

ASTM International

Environmental Product Declarations

100 Barr Harbor Drive,

West Conshohocken,

PA 19428-2959, <http://www.astm.org>

## 12 REFERENCES

1. ASTM International, Product Category Rules For Preparing an Environmental Product Declaration For Precast Concrete, March 2015.
2. ISO 21930: 2007 Building construction – Sustainability in building construction – Environmental declaration of building products.
3. ISO 14025: 2006 Environmental labeling and declarations - Type III environmental declarations - Principles and procedures.
4. ISO 14044: 2006 Environmental management - Life cycle assessment - Requirements and guidelines.
5. ISO 14040: 2006 Environmental management - Life cycle assessment - Principles and framework.
6. ASTM Program Operator for Product Category Rules (PCRs) and Environmental Product Declarations (EPDs), General Program Instructions, October 2012.



The Canadian Precast/Prestressed Concrete Institute (CPCI), and the Precast/Prestressed Concrete Institute (PCI) are the leading technical resources (Body of Knowledge (BOK)) for the precast concrete industry in North America. From this BOK building codes, design guides, educational programs, certification, sustainability programs, and new research ideas are derived.

**This joint industry initiative develops, maintains, and disseminates the BOK necessary for designing, fabricating, and constructing sustainable and resilient precast concrete structures.**



Canadian Precast/Prestressed Concrete Institute [www.cpci.ca](http://www.cpci.ca)



Precast/Prestressed Concrete Institute [www.pci.org](http://www.pci.org)

